
Product Data Sheet

TWT, U/UTP, telephony cable, 25-pair, unshielded, gray

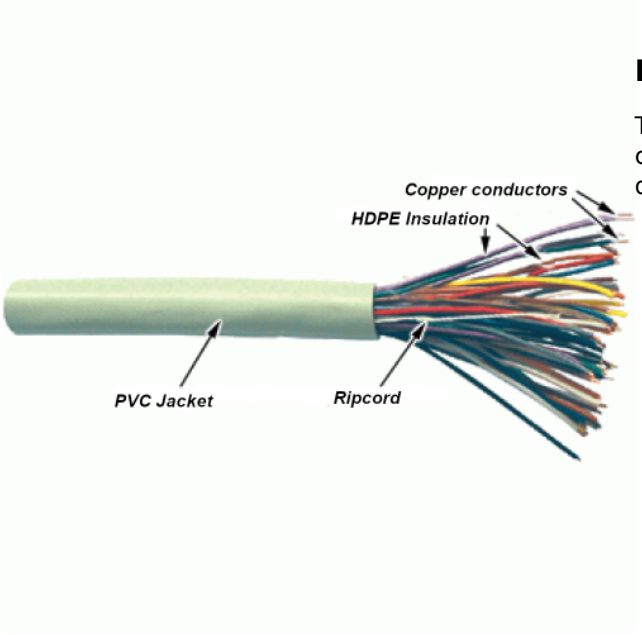

Part Number: TWT-TEL-UTP25

TWT, U/UTP, telephony cable, 25-pair, unshielded, gray for copper structured cabling systems. LANMASTER product information, specifications and part number details.

Description

Multipair voice unshielded cable can be used for indoor voice cabling, to connecting PBX ports to cross, making multipair patch-cords.

Due to thin conductors (0.35 mm) and rare twists the cable is more flexible, has low weight and smaller diameter which is better suits for cabling in cramped conditions.

Specification	Value
Jacket Color	Grey
Jacket Material	PVC (polyvinyl chloride)
Insulation Material	HDPE (high density polyethylene)
Conductor Type	Stranded
Conductor Gauge	0.35 mm
Nominal Velocity Propagation (NVP)	
Cable Diameter	10.0 mm
Cable Length per Reel	100 m
Operating Temperature	-20 ºC to 60 ºC

Part Numbers

TWT-TEL-UTP25	TWT, U/UTP, telephony cable, 25-pair, unshielded, gray

Specifications are subject to change without notice. For the most current information, consult LANMASTER or an authorized LANMASTER partner/distributor.