


Паспорт изделия

LANMASTER SFTP cable, 4 pairs, cat. 8, 2000Mhz, нг(А)-HFLTx, 305 m

Product Code: [LAN-8SFTP-HFLT](#)

LANMASTER SFTP cable, 4 pairs, cat. 8, 2000Mhz, нг(А)-HFLTx, 305 m

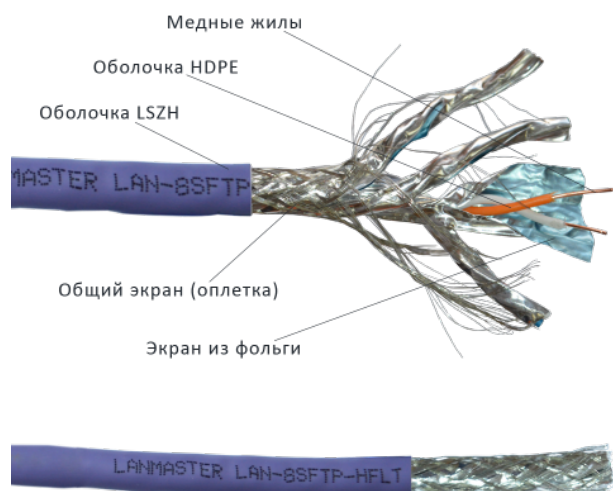

Description

Shielded 4-pair cable of category 8.1 for transmitting information at frequencies up to 2000 MHz. The cat 8 cable has an operating frequency twice that of cat7.

They are used exclusively in the professional field.

The cable design includes 4 twisted pairs in individual foil screens. The common braided shield provides reliable protection of the cable conductors from electromagnetic interference. The cable sheath is HFLTx.

Characteristic	Value
Type of conductor	Solid
Conductor Diameter	22 AWG
Insulation Type	HDPE
Outer jacket	HFLT
Sheath color	violet
Cable diameter	7,8+ _0,1 mm
Operating temperature range	to +75°C
Complies with	ANSI/TIA-568-C.2-1
Meters in a box	305 m
Frequency range	1-2000 Mhz

Model range

LAN-8SFTP-HFLT	LANMASTER SFTP cable, 4 pairs, cat. 8, 2000Mhz, нг(А)-HFLTx, 305 m
----------------	--

Product descriptions are listed according to the available information at the time of publication. Product specifications can be changed without advanced notification. More detailed and exact information can be obtained from the official partners and distributors of LANMASTER.