
Паспорт изделия

FTTH cable with messenger, outdoor




Product Code: [LAN-OFC-FOFxx-S7-PE-T](#)

FTTH cable with messenger, outdoor

Description

Subscriber cable for FTTH networks, has small size and high flexibility. Two strength members provide protection against mechanical stress. Steel rope messenger is combined with the cable to form a "figure-of-eight" structure. The jacket is made of polyethylene. The jacket color is black.

Design:

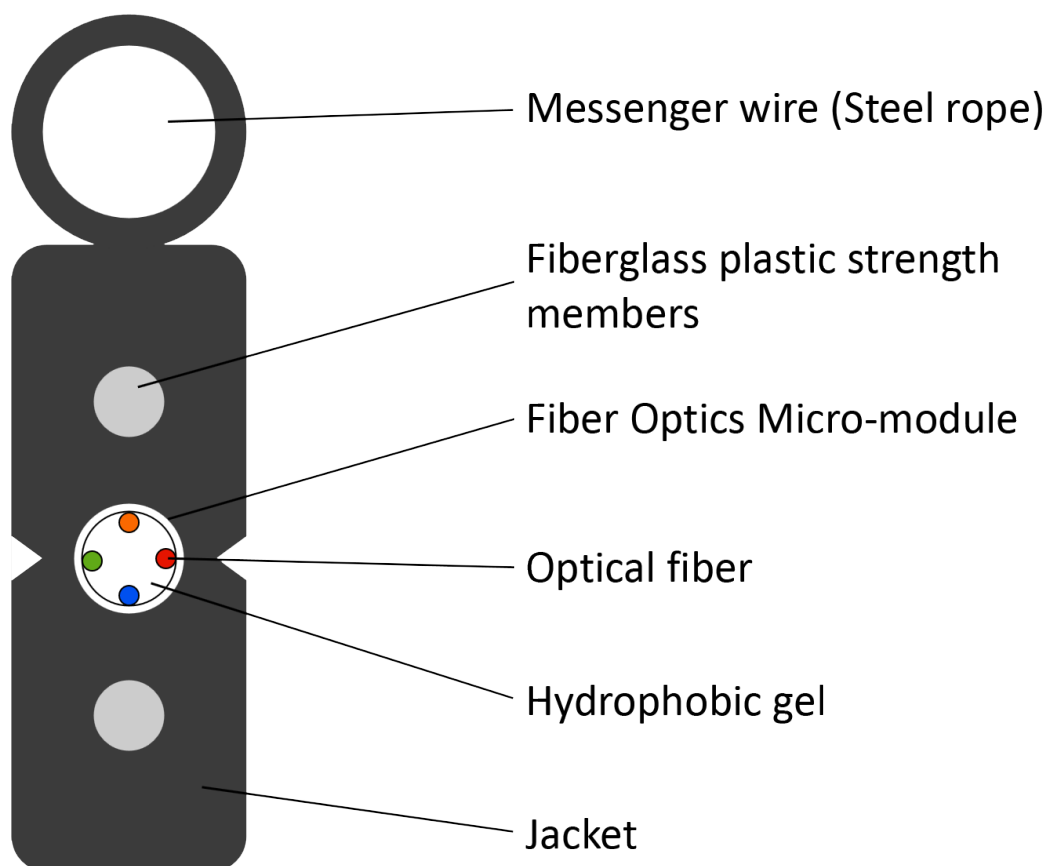

Weight and dimensions

Fiber count	1-4
Cable outer dimensions (± 0.2) mm	2.5*6
Cable weight ± 2 kg/km	17

Color identification of optical fibers

N ^o	Fibers 1-4
1	Blue
2	Orange
3	Green
4	Brown

Operating conditions

Minimum Bend Radius	Without Pulling Tension	30 cable diameters
	With Pulling Tension	60 cable diameters
Temperature range $^{\circ}\text{C}$	Installation	-20~+60
	Storage	-20~+60
	Operating	-20~+60

Physical specifications

N ^o	Specification	Value
1	Maximum pulling tension (short term impact)	600 N

2

Maximum crush resistance (short term impact)

1000 (N/100mm)

Attenuation:
Wavelength

1550nm

1310nm

Units

dB/km

dB/km

G652 single-mode
 ≤ 0.21
 ≤ 0.35
Applicable optical fibers:
Identifier

SU

S2

S5

S7

M1

M2

M3

M4

Description

Single-mode fiber with extended operating wavelength and reduced attenuation and low bending loss (ITU G.652D+G.657.A1 recommendation)

Single-mode fiber with an extended bandwidth of operating wavelengths (ITU-T G.652D recommendation)

Single-mode positive non-zero dispersion shifted fiber (ITU-T G.655 recommendation)

Single-mode with low bending loss (ITU-T G.657 recommendation)

 Multi-mode with core to cladding ratio 62,5/125 μm (IEC 60793-2-10 A1b type recommendation)

 Multi-mode with core to cladding ratio 50/125 μm (ITU-T G.651 recommendation and IEC 60793-2-10 type A1a.1 requirements)

 Multi-mode with low bending loss and core to cladding ratio 50/125 μm (ITU-T G.651 recommendation and IEC 60793-2-10 A1a.2 type requirements)

 Multi-mode with low bending loss and core to cladding ratio 50/125 μm (ITU-T G.651 recommendation and IEC 60793-2-10 A1a.3 type requirements)

Product code

LAN-OFC-FOFn-yy-zz-T

Description

Outdoor FTTH Drop cable with messenger, flat, FRP, PE, n fibers, SM G657/OS2 Ultra/OS2/OM1/OM2/OM3/OM4, black

n - fiber count

yy - fiber type (SU, S2, S5, S7, M1, M2, M3, M4)

zz - jacket type is PE (polyethylene)

T - messenger wire

Model range

LAN-OFC-FOF1-S7-PE-T	Outdoor FTTH Drop cable with messenger, flat, FRP, PE, 1 fiber, G657 SM, black
LAN-OFC-FOF2-S7-PE-T	Outdoor FTTH Drop cable with messenger, flat, FRP, PE, 2 fibers, G657 SM, black

LAN-OFC-FOF4-S7-PE-T	Outdoor FTTH Drop cable with messenger, flat, FRP, PE, 4 fibers, G657 SM, black
----------------------	---

Product descriptions are listed according to the available information at the time of publication. Product specifications can be changed without advanced notification. More detailed and exact information can be obtained from the official partners and distributors of LANMASTER.