Паспорт изделия

Keystone module, RJ45, category 6, STP, 180 degrees



Product Code: LAN-OK45S6/180

Keystone module, RJ45, category 6, STP, 180 degrees

Description

The module can be used to complete shielded telecommunication sockets installed in wall trunks, in a wall box, also for installation in modular patch panels (see the compatibility items).

Category 6 compliant.


The module has a standard Keystone form-factor and can be used not only in LANMASTER socket adapters, but also in socket adapters from other manufacturers.

There is a shielded eight-pin RJ-45 socket on the front side of the module, and there is a block for eight contacts of the IDC110 type on the back side, located at an angle of 180˚ to the front surface of the module.

The continuity of the screen is ensured by a cable clamp (in the form of a metal clasp) and a shielded cover.

The insulation displacement contact method is used (IDC) to terminate incoming cable.

There is a wiring diagram for the cable conductors between the IDC pins in accordance with the T568A and T568B wire map for ease of installation.

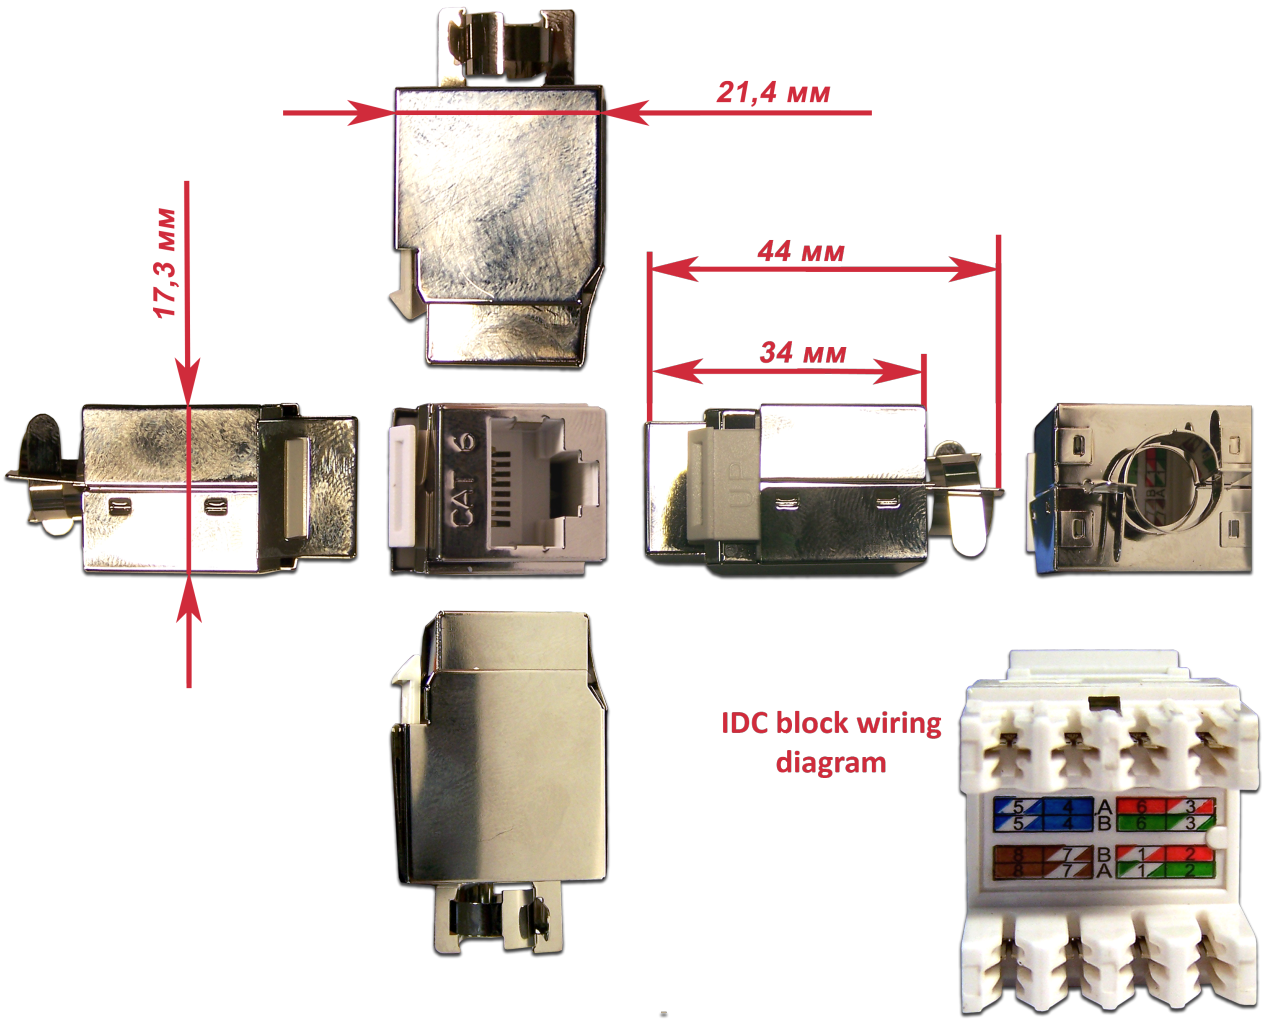

Model range

LAN-OK45S6/180	Keystone module, RJ45, category 6, STP, 180 degrees

Product descriptions are listed according to the available information at the time of publication. Product specifications can be changed without advanced notification. More detailed and exact information can be obtained from the official partners and distributors of LANMASTER.