
Паспорт изделия

Vertical power distribution unit, single-phase, 32A, 12xC19 + 36xC13 + 3xSchuko, 3-meter power cord, IEC309 plug



Product Code: [TWT-PDV-12x36x3S-32A](#)

Vertical power distribution unit, single-phase, 32A,
12xC19 + 36xC13 + 3xSchuko, 3-meter power cord,
IEC309 plug

Description

The distribution unit is intended for power distribution and protection of computers, electronic and network equipment with C20, C14 inlets or German style Schuko plugs in telecommunication cabinets and racks. The PDU solves the problems of insufficient length of equipment power cords, ease of access and maintenance.


The unit is equipped with a power cord with **IEC 309** earthed plug for connecting to power mains and a **32A** circuit breaker, which is used as a switch.

To prevent accidental shutdown the breaker has a protective cover.

The unit has groups of sockets: 3 groups of **four C19** connectors (IEC 60320 C19, earthed), 3 groups of **twelve C13** connectors (IEC 60320 C13, earthed), and **3** German style **Schuko** sockets with protective shutters (DIN49440).

The distribution unit is 1.84 meter high and can be mounted vertically in 19" cabinets and racks in designated spaces.

The PDU is mounted using two mounting brackets located at the ends of the block. The design of the brackets allows them to be rotated 180° for installation parallel to the front side of the PDU.

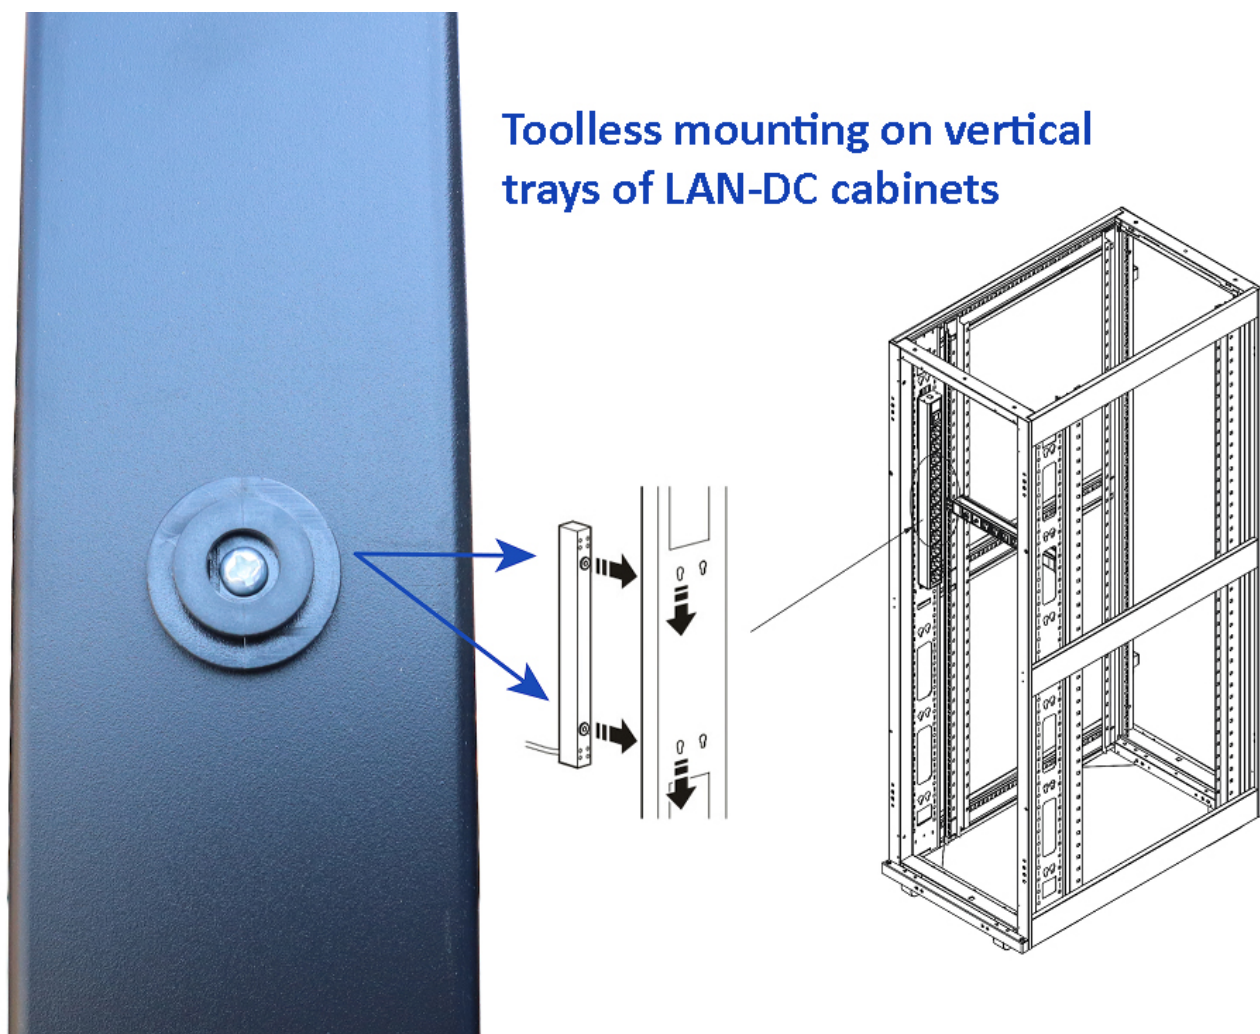

Toolless mounting on vertical trays of LAN-DC cabinets

Vertical trays of [LAN-DC](#) series cabinets have special hinged holes arranged with a certain height step. Installing the PDU into these holes is done using two clips located on the back of the PDU case without the use of a tool. This method is fast and convenient. The PDU has the necessary clips in the package.

It is recommended to use additional equipment mounting [TWT-CB-BKT](#) brackets for the missing support points

when installing the PDU in cabinets and racks.

Allowed to mount the unit on the wall and other surfaces using wall mounting [TWT-PPLEG-65/TWT-PPLEG-130](#) brackets.

Specifications:

-
- Supply voltage is 220V (up to 250V)
- Total load current is no more than 32A
- Dimensions (WxHxD) - 55x1840,5x62 mm

Model range

TWT-PDV-12x36x3S-32A	Vertical power distribution unit, single-phase, 32A, 12xC19 + 36xC13 + 3xSchuko, 3-meter power cord, IEC309 plug
----------------------	--

Product descriptions are listed according to the available information at the time of publication. Product specifications can be changed without advanced notification. More detailed and exact information can be obtained from the official partners and distributors of LANMASTER.