


Паспорт изделия

TWT RG11U 75 Ohm Coaxial cable, CCS, 96*0.16 mm AL braid, PE, outdoor, black, 305 m

Product Code: [TWT-RG11-CS96/3-OUT](#)

TWT RG11U 75 Ohm Coaxial cable, CCS, 96*0.16 mm AL braid, PE, outdoor, black, 305 m

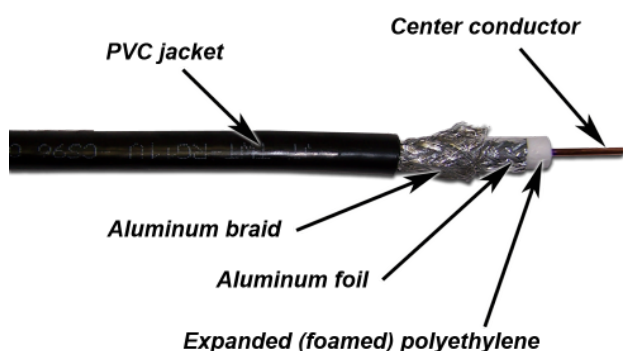

Description

It is used for cabling television backbone networks. Used for outdoor installation or when burring directly in the ground.

Center conductor: copper clad steel wire (CCS), solid

Center conductor insulation: low density expanded (foamed) polyethylene

Shield: aluminum laminated foil and aluminum braid

Outer jack: PE (polyethylene)


Color: Black

Packaging: 305 m on a reel

Physical characteristics of the cable:

		Characteristics	Value
Center conductor		Diameter	1.63+/-0.01 (14AWG)
Conductor insulation		Material	Copper Clad Steel (CCS)
		Diameter	7.20+/-0.13 mm
		Centering	>=90 %
Shield	№1	Material	Aluminum foil

Jacket	№2	Shield density	100%
		Thickness	0,16 mm
Temperature	Weight	Number of wires	6/16
		Shield density	60%
		Material	Aluminum
		Cable diameter by shield	7,91 mm
		Diameter	10.20±0.10 mm
		Material	PE
		Dielectric strength of the outer jacket	3000Vac
		Color	Black
		Operating	from -40°C to +70°C
		Of 1 km of cable	100 kg

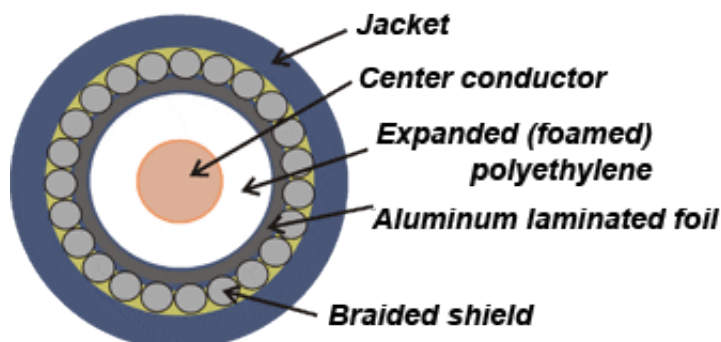

Electrical (transmission) characteristics of the cable:

Characteristics	Value
Wave impedance	75±3 Ohm
Electrical capacitance	53±2 pF/m
Nominal velocity propagation	83 %
Return loss at 5 - 1000 MHz	≥20 dB
Attenuation, dB/100 m (20°C)	
	55 MHz
	211 MHz
	450 MHz
	600 MHz
	870 MHz
	1000 MHz
	0,96
	1,9
	2,75
	3,18
	4,06
	4,35

Model range

TWT-RG11-CS96/3-OUT	TWT RG11U 75 Ohm Coaxial cable, CCS, 96*0.16 mm AL braid, PE, outdoor, black, 305 m
---------------------	---

Product descriptions are listed according to the available information at the time of publication. Product specifications can be changed without advanced notification. More detailed and exact information can be obtained from the official partners and distributors of LANMASTER.