Product Data Sheet

TWT, U/UTP, Category 5e, twisted-pair cable, 1-pair, unshielded, PVC, gray, 305 m

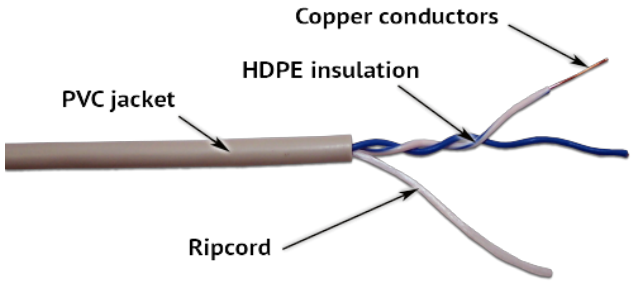

Part Number: TWT-5EUTP1-GY

TWT, U/UTP, Category 5e, twisted-pair cable, 1-pair, unshielded, PVC, gray, 305 m for copper structured cabling systems. LANMASTER product information, specifications and part number details.

Description

Single pair cables are budget solution for voice, fair alarm, and security cabling. Also, they can be used as cross wires.

The cable comprises two solid copper 24 AWG conductors. Each conductor is insulated with HDPE (high density polyethylene). Those two conductors are twisted with specially selected step in a single twisted pair and covered with PVC jacket.

Specification	Value
Jacket Color	Grey
Jacket Material	PVC (polyvinyl chloride)
Insulation Material	HDPE (high density polyethylene)
Conductor Gauge, single	24 AWG
Conductor Type	Solid
Cable Diameter	3 mm
Operating Temperature	-20 ºC to +75 ºC
Cable Length per Box	305 m
Regulatory Certifications	ETL VERIFIED, UL, CSA
Regulatory Compliance	TIA/EIA 568-D.2 cat. 5e

Part Numbers

TWT-5EUTP1-GY	TWT, U/UTP, Category 5e, twisted-pair cable, 1-pair, unshielded, PVC, gray, 305 m

Specifications are subject to change without notice. For the most current information, consult LANMASTER or an authorized LANMASTER partner/distributor.