
Паспорт изделия

TWT UTP cable, 4 pairs, category 6, LSZH

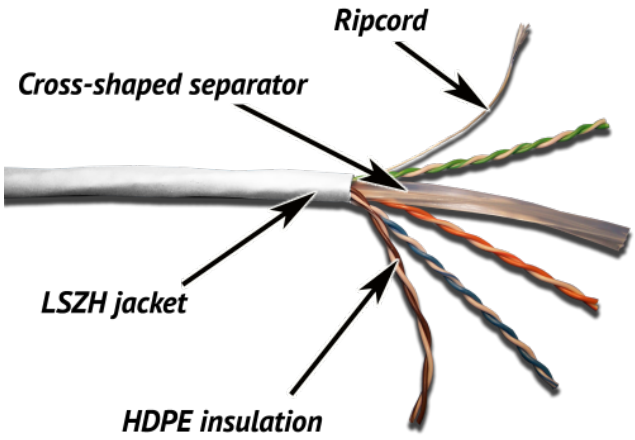

Product Code: TWT-6UTP-LSZH

TWT UTP cable, 4 pairs, category 6, LSZH

Description

Unshielded four pairs category 6 cable is designed for digital and analog signals transmission on frequencies below 250 MHz

The cable comprises four twisted pairs of solid copper conductors are parted with a separator under a single jacket.

Box dimensions (DxWxH) – 395 x 239 x 395 mm.

Specification	Value
Jacket Color	
Jacket Material	LSZH (low some, zero halogen)
Insulation Material	HDPE (high density polyethylene)
Conductor Gauge, single	23 AWG
Conductor Type	Solid
Cable Diameter	6,4 mm
Operating Temperature	-20 ºC to 75 ºC
Cable Length per Box	305 m
Nominal velocity propagation (NVP)	69%
Regulatory Certifications	UL, ETL and 3P Verified to ANSI/TIA/EIA568-D.2-1 Category 6
Regulatory Compliance	TIA/EIA568-D.2-1 Category 6, ISO/IEC 11801-1:2017,

EN 50288-6-1:2013

Model range

TWT-6UTP-LSZH	TWT UTP cable, 4 pairs, category 6, LSZH

Product descriptions are listed according to the available information at the time of publication. Product specifications can be changed without advanced notification. More detailed and exact information can be obtained from the official partners and distributors of LANMASTER.